



Monitoring Discrete Activities of Daily Living of Young and Older Adults Using 5.8 GHz Frequency Modulated Continuous Wave Radar and ResNet Algorithm

Umer Saeed¹(✉), Fehaid Alqahtani², Fatmah Baothman³, Syed Yaseen Shah⁴,
Syed Ikram Shah⁵, Syed Salman Badshah⁶, Muhammad Ali Imran⁷,
Qammer H. Abbasi⁷, and Syed Aziz Shah¹

¹ Research Centre for Intelligent Healthcare, Coventry University,
Coventry CV1 5FB, UK

{saeedu3,syed.shah}@coventry.ac.uk

² Department of Computer Science, King Fahad Naval Academy,
Al Jubail 35512, Saudi Arabia

F-alqahtani@rsnf.gov.sa

³ Faculty of Computing and Information Technology, King Abdul Aziz University,
Jeddah 21431, Saudi Arabia

fbaothman@kau.edu.sa

⁴ School of Computing, Engineering and Built Environment,
Glasgow Caledonian University, Glasgow G4 0BA, UK

syedyaseen.shah@gcu.ac.uk

⁵ College of Electrical and Mechanical Engineering, National University of Sciences
and Technology, Islamabad 44000, Pakistan

syed.shah15@ce.ceme.edu.pk

⁶ School of Electronics Engineering, Xidian University, Xi'an 710071, China

⁷ James Watt School of Engineering, University of Glasgow, Glasgow G12 8QQ, UK
{muhammad.imran,qammer.abbasi}@glasgow.ac.uk

Abstract. With numerous applications in distinct domains, especially healthcare, human activity detection is of utmost significance. The objective of this study is to monitor activities of daily living using the publicly available dataset recorded in nine different geometrical locations for ninety-nine volunteers including young and older adults (65+) using 5.8 GHz Frequency Modulated Continuous Wave (FMCW) radar. In this work, we experimented with discrete human activities, for instance, walking, sitting, standing, bending, and drinking, recorded for 10s and 5s. To detect the list of activities mentioned above, we obtained the Micro-Doppler signatures through Short-time Fourier transform using MATLAB tool and procured the spectrograms as images. The acquired data of the spectrograms are trained, validated, and tested exploiting a state-of-the-art deep learning approach known as Residual Neural Network

(ResNet). Moreover, the confusion matrix, model loss, and classification accuracy are used as performance evaluation metrics for the trained ResNet model. The unique skip connection technique of ResNet minimises the overfitting and underfitting issue, consequently resulting accuracy rate up to 91%.

Keywords: Radar sensor · Non-invasive healthcare · Human activities identification · Deep learning · ResNet

1 Introduction

Activities of daily living (ADL) are essential and routine tasks that most healthy young and older adults can perform without assistance. The inability to perform these ADL might cause unsafe conditions and poor quality of life [1]. The healthcare team should be aware of the importance of assessing ADL in patients to help ensure that patients who require assistance and are identified [2]. Thus monitoring ADL is of utmost importance since any activity undetected can cause fatal injuries [3].

Recently, several sensing technologies have been implemented in this context to resolve these crucial issues and allow the identification of several human activities [4–12] or activities in order to detect critical events like falls [13–15]. Wearable sensors [16], thermal imaging [17], pressure sensors [18], and Radio Frequency (RF) sensors such as lightweight and low-cost radar schemes are among the technologies which can be effectively used for the identification of human activities [7, 19, 20]. To choose one or more technologies [20–24], we must analyze the benefits and drawbacks of each sensor when it comes to performance evaluation metrics like false alarms, model accuracy, proportion of failed identifications, cost, user compliance, and ease of deployment. Pressure and wearable sensors, for instance, have high detection accuracy, nevertheless, the gadget must be worn on the human’s body, which can be uncomfortable at times, and the thermal imaging camera poses privacy issues. The radar sensor, on the other hand, provides an inexpensive, non-contact, and readily deployable solution for monitoring everyday activities [25].

This paper presents a deep learning-based solution utilizing Residual Neural Network (ResNet) for the identification of prevalent human activities like walking, sitting, standing, and other activities. To record human activities, we have used Frequency Modulated Continuous Wave (FMCW) radar exploiting Micro-Doppler (MD) signatures. Volunteers took part in the data collection process, which occurred in distinct locations. After data preprocessing, the deep learning model was trained to identify unknown human activities.

2 Methodology

2.1 Data Acquisition

We have used the dataset obtained for the recently finished project “Intelligent RF Sensing for Falls and Health Prediction - INSHEP” funded by Engineering and Physical Sciences Research Council (EPSRC).

(<http://researchdata.gla.ac.uk/848/>) [26].

This dataset was recorded using an FMCW radar functioning at C-band (5.8 GHz) over a bandwidth of 400 MHz and an output power of +18 dBm. The radar was connected to an antenna with +17 dBm gain. A total of 99 volunteers took part in the experimental campaign, with an age range of 21 years to 99 years at 9 different and separate locations and data was recorded for 10s (walking) and rest of the activities for 5s with 3 repetitions for each activity. The received signal was used to generate MD signatures using Short-time Fourier transform. The typical radar working principle is shown in Fig. 1(a), where a radio frequency signal is transmitted and received when encountering any object within its range. Figure 1(b) depicts the typical waveform of FMCW radar. Every movement of the body produces a distinct MD signature that can be employed to distinguish between various everyday activities [27–29]. Fundamentally, FMCW radar is a kind of radar sensor that, like a basic continuous-wave radar, emits continuous transmission power. FMCW radar, unlike continuous-wave radar, can adjust its working frequency throughout the measurements.

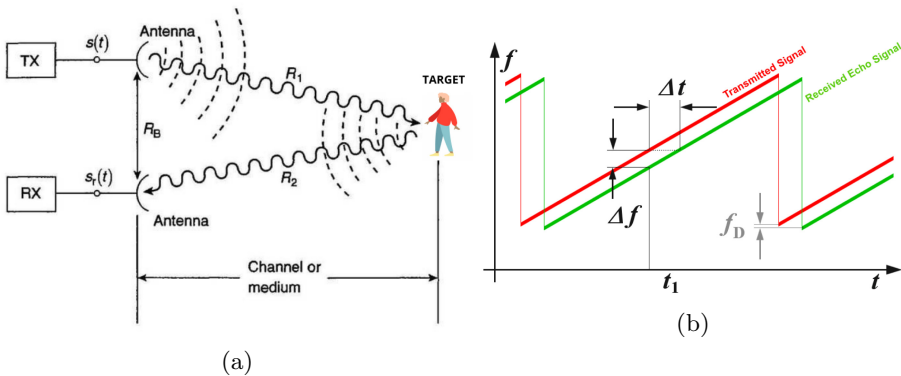


Fig. 1. (a) Typical radar working principle using reflected RF signal (b) FMCW radar waveform.

In this work, five distinct human activities were recorded using FMCW radar in separate locations, which were walking forward and back, sitting on a seat, standing from a seat, bending down to pick up an item, and drinking from a cup in standing position, as illustrated in Fig. 2 and listed in Table 1. Each human was asked to replicate the same task two or three times in order to collect data.

Figure 3 depicts the MD signatures of the data measurements. The spectrograms of a subject walking forward and back in front of radar are easily distinguishable from other activities. Activities like sitting on a seat and getting up from a seat are almost flipped images of each other. As shown in Fig. 3, when a subject bends down to pick up an item, the positive Doppler frequency changes significantly from 1.5–3 s. As the subject stood up again, a substantial alter in frequency was noted from 3.5–5 s.

Table 1. List of activities performed on humans.

Label	Activity
Activity 1	Walking (Forward and Back)
Activity 2	Sitting (On a Seat)
Activity 3	Standing (From a Seat)
Activity 4	Bending (Pick up Object)
Activity 5	Drinking (Standing Position)

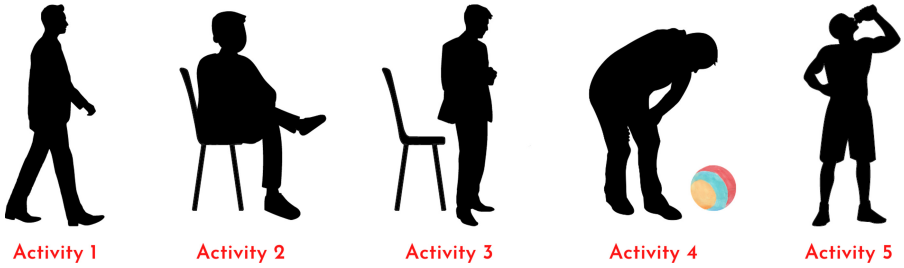


Fig. 2. Illustration of five distinct human activities. Activity 1 (Walking), Activity 2 (Sitting), Activity 3 (Standing), Activity 4 (Bending), Activity 5 (Drinking).

2.2 Classification Using Residual Neural Network

Machine learning-based techniques have been successfully employed in the past for different classification tasks [30–35]. In this paper, to classify distinct human activities through the obtained spectrograms, we have utilized a deep learning-based algorithm called Residual Neural Network or ResNet. The ability to train such a deep neural network (DNN) involves the use of skip connections. The input that feeds a layer is also applied to the output of a layer further up the stack. The aim of training a DNN is to get it to model a target function $h(x)$. If the network’s output to the input is linked, for instance, adding a skip connection, the network would be strained to model $f(x) = h(x) - x$ instead of $h(x)$ [36,37]. This is referred to as “Residual Learning”, as shown in Fig. 4.

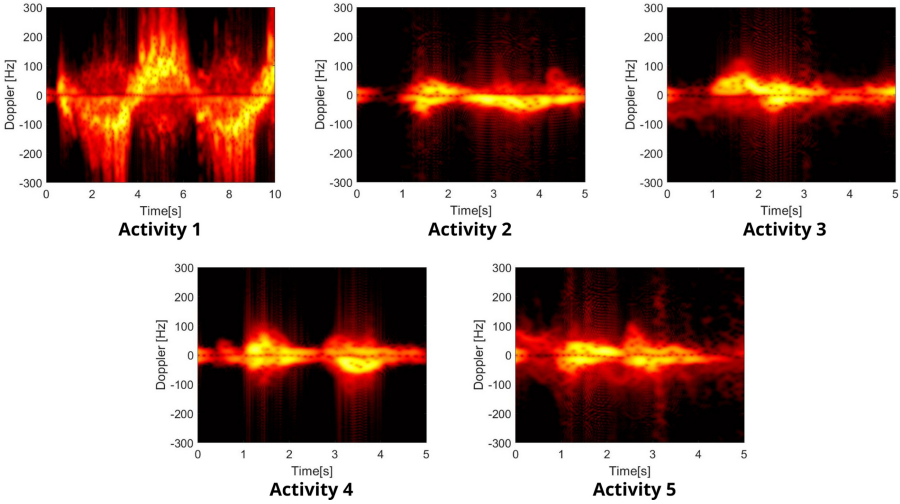


Fig. 3. Spectrograms of older adult with limited mobility - five different human activities.

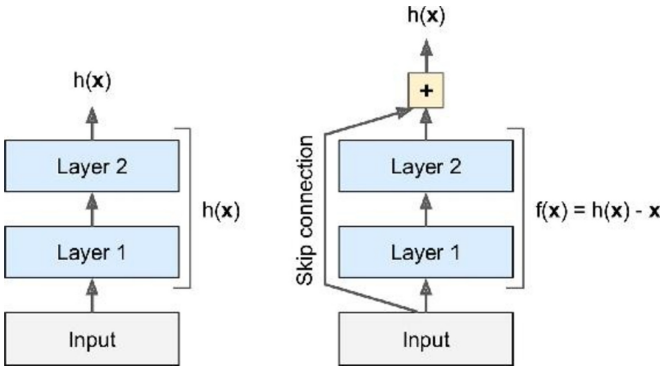


Fig. 4. ResNet learning framework.

The weights of a standard DNN are nearly zero when it is first initialised, so the network only outputs values near to zero. When a skip connection is added to the resulting network, it simply outputs a replica of its input, in other terms, it models the identity function at first. The training process can be significantly accelerated if the target function is close to the identity function which is frequently the case. Moreover, by adding a large number of skip connections, the network can begin to improve even though many layers are yet to learn. The signal can effectively traverse the whole network due to skip connections technique. The ResNet can be thought of as a pile of residual units, each of which is a diminutive neural network with a skip connection.

Furthermore, the establishment of a statistical relationship between the partial differential equation and the convolutional-residual-block assists to understand that why ResNet can be deeper to generate fine results in different tasks [38]. First, consider the following two-order partial differential equation:

$$\frac{\partial u(x, t)}{\partial t} = \frac{1}{2}\sigma^2 \frac{\partial^2 u(x, t)}{\partial x^2} + b \frac{\partial u(x, t)}{\partial x} + cu(x, t) \quad (1)$$

Equation 1 can be written in discrete form as:

$$u(x, t+1) - u(x, t) = \frac{1}{2}\sigma^2(u(x+1, t) - 2u(x, t) + u(x-1, t)) + \frac{b}{2}(u(x+1, t) - u(x-1, t)) + cu(x, t) \quad (2)$$

Equation 2 can be rewritten in convolutional form as:

$$u(x, t+1) = u(x, t) + \left[\frac{1}{2}(\sigma^2 + b), c - \sigma^2, \frac{1}{2}(\sigma^2 - b)\right] * u(x, t) \quad (3)$$

As regard to the convolutional-kernel as $w(x, t)$, Eq. 3 has the same structure as residual-block:

$$u(x, t+1) = u(x, t) + w(x, t) * u(x, t) \quad (4)$$

According to the results of the aforementioned analysis, any two-order partial differential equation could be altered as residual-block through a convolutional-kernel size of three, and any higher-order partial differential equation could be transformed to a residual-block through a greater convolutional-kernel. The residual-block and the two-order partial differential equation have a correspondence since the ResNet kernel size is normally minimal. Furthermore, the Fourier Transform is commonly utilized in the solution of partial differential equation, and it can help explain why, as previously mentioned, deeper ResNet contributes to better results. We get the following statistics by applying the Fourier Transform to Eq. 1:

$$\hat{T}_x = \frac{1}{2}\sigma^2 \frac{\partial^2}{\partial x^2} + b \frac{\partial}{\partial x} + c \iff \hat{T}_p = -\frac{1}{2}\sigma^2 p^2 + ibp + c \quad (5)$$

$$\hat{T}_p \tilde{u}(p, t) = \frac{d}{dt} \tilde{u}(p, t) \quad (6)$$

Solution of Eq. 6 is:

$$\tilde{u}(p, t) = e^{\hat{T}_p t} \tilde{u}(p, 0) \quad (7)$$

If time t is minimal adequate, we get:

$$\tilde{u}(p, t) \approx (1 + \hat{T}_p t) \tilde{u}(p, 0) \quad (8)$$

The following relationship can be obtained from the convolutional theorem by applying the inverse Fourier Transform to Eq. 8:

$$u(x, t) = u(x, 0) + t\hat{T}_x\delta(x) * u(x, 0) \quad (9)$$

Equations 4 and 9 are explicitly similar, and the convolutional-kernel $w(x, t)$ in continuous space corresponds to $t\hat{T}_x\delta(x)$. From a discrete point of view, Eq. 4 characterises the relation between the partial differential equation and the ResNet, while Eq. 9 captures the nature of the relation in the continuous domain. The numerals of the convolutional-kernels in residual-blocks are exceptionally minor. This is consistent with the fact that time t is short, since a short time span t means that the convolutional-kernel $t\hat{T}_x\delta(x)$ is mathematically small from Eq. 7–8. Furthermore, the lower size of the convolutional-kernels results in a low-order partial differential equation, which streamlines the iterative system’s evolution. The analysis of the relation between the partial differential equation and residual-block provides insight into better comprehension of ResNet.

3 Results and Discussion

The ResNet algorithm considered in this study to identify distinct human activities was constructed in Python, primarily utilizing the TensorFlow and NumPy libraries. In this work, classification accuracy metric was taken into consideration to assess the performance of a trained model. The classification accuracy, in this case, human activity identification accuracy, can be described as the proportion of accurately identified human activities to the total number of human activities.

$$\text{Identification Accuracy} = \frac{\text{Number of human activities identified}}{\text{Total number of human activities}} \quad (10)$$

The dataset acquired consisted of five diverse human activities as listed in Table 1. Overall, 48×5 spectrograms were used for simulations, in which 22×5 were used for training, 4×5 for validation, and 22×5 for testing. Considering the size of a dataset, the number of epochs were set to 15 only and the DNN model ResNet was able to achieve accuracy up to 91%, as demonstrated in Fig. 5. Moreover, the model loss was recorded less than 0.5 as the number of epochs enhanced.

Additionally, Fig. 6 presents a confusion matrix of different human activities identified through the trained deep learning model. The ResNet was able to identify the walking activity with 100% accuracy. Moreover, there were only two misclassified instances for sitting and standing activities, hence exhibiting accuracy up to 90%. Whilst testing the trained model ResNet, the bending activity revealed maximum misclassified instances up to four against the drinking activity, therefore disclosing 81.8% accuracy. Lastly, the drinking activity unveiled 95% accuracy with only one misclassification against bending activity.

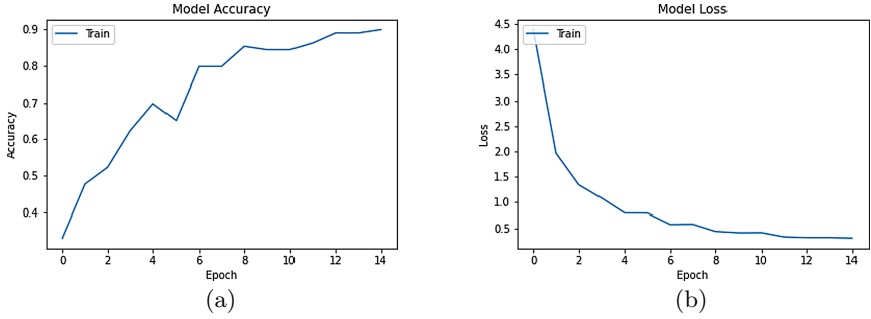


Fig. 5. (a) ResNet model accuracy and (b) model loss against the number of epochs.

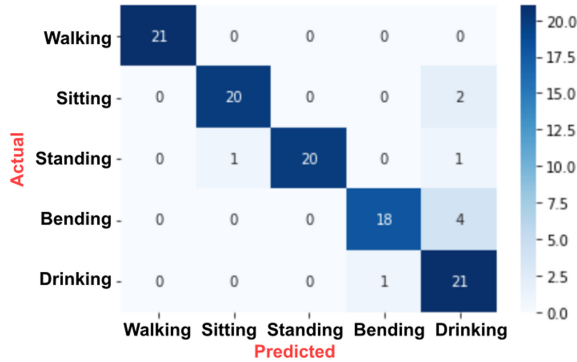


Fig. 6. Confusion matrix of five distinct human activities classified through ResNet.

4 Conclusions and Future Work

The idea behind this research is to exploit existing radar data to classify activities of daily living when data was obtained in nine different locations for ninety-nine volunteers. In this work, we provided preliminary findings for a simplified method that utilizes the FMCW radar to recognise distinct human activities such as walking, sitting, standing, bending, and drinking. As part of the experimental study, subjects were requested to undertake the five aforementioned human tasks at different geometrical positions. The radar system's MD signatures were then used as image data, and diverse features were extracted, validated, and trained using a well-known deep learning approach called ResNet. After training, the model was tested on various human activities spectrograms and simulation results revealed that ResNet attained up to 91% accuracy overall.

In the future, we aim to experiment with diverse diminutive human activities such as chest movement, lung movement, and minor gestures through hands or feet. Furthermore, we intend to utilize cutting-edge deep learning techniques such as Generative Adversarial Networks in order to regenerate lower acquired classes or instances from the datasets, hence increasing the performance of the trained algorithm.

References

1. Nguyen, H., Lebel, K., Bogard, S., Goubault, E., Boissy, P., Duval, C.: Using inertial sensors to automatically detect and segment activities of daily living in people with Parkinson's disease. *IEEE Trans. Neural Syst. Rehabil. Engineering* **26**(1), 197–204 (2018)
2. Soma, T., Lawanont, W., Yokemura, T., Inoue, M.: Monitoring system for detecting decrease of living motivation based on change in activities of daily living. In: 2020 IEEE International Conference on Consumer Electronics (ICCE), pp. 1–4 (2020)
3. Saeed, U., et al.: Discrete human activity recognition and fall detection by combining FMCW RADAR data of heterogeneous environments for independent assistive living. *Electronics* **10**(18), 2237 (2021)
4. Shah, S.A., et al.: Privacy-preserving wandering behavior sensing in dementia patients using modified logistic and dynamic newton Leipnik maps. *IEEE Sens. J.* **21**(3), 3669–3679 (2021)
5. Hossain, T., Inoue, S.: Sensor-based daily activity understanding in caregiving center. In: 2019 IEEE International Conference on Pervasive Computing and Communications Workshops (PerCom Workshops), pp. 439–440 (2019)
6. Totty, M.S., Wade, E.: Muscle activation and inertial motion data for noninvasive classification of activities of daily living. *IEEE Trans. Biomed. Eng.* **65**(5), 1069–1076 (2018)
7. Shah, S.A., et al.: Sensor fusion for identification of freezing of gait episodes using Wi-Fi and radar imaging. *IEEE Sens. J.* **20**(23), 14410–14422 (2020)
8. Tuncer, T., Ertam, F., Dogan, S., Subasi, A.: An automated daily sports activities and gender recognition method based on novel multikernel local diamond pattern using sensor signals. *IEEE Trans. Instrum. Meas.* **69**(12), 9441–9448 (2020)
9. Shah, S.A., et al.: Privacy-preserving non-wearable occupancy monitoring system exploiting Wi-Fi imaging for next-generation body centric communication. *Micro-machines* **11**(4), 379 (2020)
10. Shah, S.A., Fioranelli, F.: RF sensing technologies for assisted daily living in healthcare: a comprehensive review. *IEEE Aerosp. Electron. Syst. Mag.* **34**(11), 26–44 (2019)
11. Shah, S.A., Fan, D., Ren, A., Zhao, N., Yang, X., Tanoli, S.A.K.: Seizure episodes detection via smart medical sensing system. *J. Ambient Intell. Humaniz. Comput.* **11**, 1–13 (2018). <https://doi.org/10.1007/s12652-018-1142-3>
12. Shah, S.A., et al.: Buried object sensing considering curved pipeline. *IEEE Antennas Wirel. Propag. Lett.* **16**, 2771–2775 (2017)
13. Taylor, W., Shah, S.A., Dashtipour, K., Zahid, A., Abbasi, Q.H., Imran, M.A.: An intelligent non-invasive real-time human activity recognition system for next-generation healthcare. *Sensors* **20**(9), 2653 (2020)
14. Mohankumar, P., Ajayan, J., Mohanraj, T., Yasodharan, R.: Recent developments in biosensors for healthcare and biomedical applications: a review. *Measurement* **167**, 108293 (2021)
15. Ali, F., et al.: An intelligent healthcare monitoring framework using wearable sensors and social networking data. *Future Gener. Comput. Syst.* **114**, 23–43 (2021)
16. Dua, N., Singh, S.N., Semwal, V.B.: Multi-input CNN-GRU based human activity recognition using wearable sensors. *Computing* **103**(7), 1461–1478 (2021). <https://doi.org/10.1007/s00607-021-00928-8>
17. Naik, K., Pandit, T., Naik, N., Shah, P.: Activity recognition in residential spaces with internet of things devices and thermal imaging. *Sensors* **21**(3), 988 (2021)

18. Jiajun, X., Wang, G., Yufan, W., Ren, X., Gao, G.: Ultrastretchable wearable strain and pressure sensors based on adhesive, tough, and self-healing hydrogels for human motion monitoring. *ACS Appl. Mater. Interfaces* **11**(28), 25613–25623 (2019)
19. Saeed, U., et al.: Wireless channel modelling for identifying six types of respiratory patterns with SDR sensing and deep multilayer perceptron. *IEEE Sens. J.* **21**(18), 20833–20840 (2021)
20. Dong, B., et al.: Monitoring of atopic dermatitis using leaky coaxial cable. *Healthc. Technol. Lett.* **4**(6), 244–248 (2017)
21. Yang, X., et al.: *s*-band sensing-based motion assessment framework for cerebellar dysfunction patients. *IEEE Sens. J.* **19**(19), 8460–8467 (2018)
22. Haider, D., et al.: An efficient monitoring of eclamptic seizures in wireless sensors networks. *Comput. Electr. Eng.* **75**, 16–30 (2019)
23. Khan, S.A., et al.: An experimental channel capacity analysis of cooperative networks using universal software radio peripheral (USRP). *Sustainability* **10**(6), 1983 (2018)
24. Yang, X., et al.: Diagnosis of the hypopnea syndrome in the early stage. *Neural Comput. Appl.* **32**(3), 855–866 (2020). <https://doi.org/10.1007/s00521-019-04037-8>
25. Shah, S.A., Fioranelli, F.: Human activity recognition: preliminary results for dataset portability using FMCW RADAR. In 2019 International Radar Conference (RADAR), pp. 1–4. IEEE (2019)
26. Shah, S.A., Li, H., Shrestha, A., Yang, S., Fioranelli, F., Kernec, L.: Intelligent RF sensing for falls and health prediction - inshep – dataset (2019)
27. Amin, M.G., Zhang, Y.D., Ahmad, F., Dominic Ho, K.C.: Radar signal processing for elderly fall detection: the future for in-home monitoring. *IEEE Signal Process. Mag.* **33**(2), 71–80 (2016)
28. Fioranelli, F., Kernec, J.L., Shah, S.A.: Radar for health care: recognizing human activities and monitoring vital signs. *IEEE Potentials* **38**(4), 16–23 (2019)
29. Shah, S.A., Abbas, H., Imran, M.A., Abbasi, Q.H.: RF sensing for healthcare applications. *Backscattering RF Sens. Future Wirel. Commun.* 157–177 (2021)
30. Saeed, U., Jan, S.U., Lee, Y.-D., Koo, I.: Fault diagnosis based on extremely randomized trees in wireless sensor networks. *Reliab. Eng. Syst. Saf.* **205**, 107284 (2021)
31. Ashleibta, A.M., Abbasi, Q.H., Shah, S.A., Khalid, A., AbuAli, N.A., Imran, M.A.: Non-invasive RF sensing for detecting breathing abnormalities using software defined radios. *IEEE Sens. J.* **21**, 5111–5118 (2020)
32. Jan, S.U., Lee, Y.-D., Shin, J., Koo, I.: Sensor fault classification based on support vector machine and statistical time-domain features. *IEEE Access* **5**, 8682–8690 (2017)
33. Saeed, U., Lee, Y.-D., Jan, S.U., Koo, I.: CAFD: context-aware fault diagnostic scheme towards sensor faults utilizing machine learning. *Sensors* **21**(2), 617 (2021)
34. Huma, Z.E., et al.: A hybrid deep random neural network for cyberattack detection in the industrial internet of things. *IEEE Access* **9**, 55595–55605 (2021)
35. Churcher, A., et al.: An experimental analysis of attack classification using machine learning in IoT networks. *Sensors* **21**(2), 446 (2021)
36. He, K., Zhang, X., Ren, S., Sun, J.: Deep residual learning for image recognition. In: *Proceedings of the IEEE Conference on Computer Vision and Pattern Recognition*, pp. 770–778 (2016)

37. Géron, A.: Hands-on Machine Learning with Scikit-Learn, Keras, and TensorFlow: Concepts, Tools, and Techniques to Build Intelligent Systems. O'Reilly Media, Newton (2019)
38. Yin, M., Li, X., Zhang, Y., Wang, S.: On the mathematical understanding of ResNet with Feynman path integral. arXiv preprint [arXiv:1904.07568](https://arxiv.org/abs/1904.07568) (2019)